


RINGSPANN®

Gear Couplings

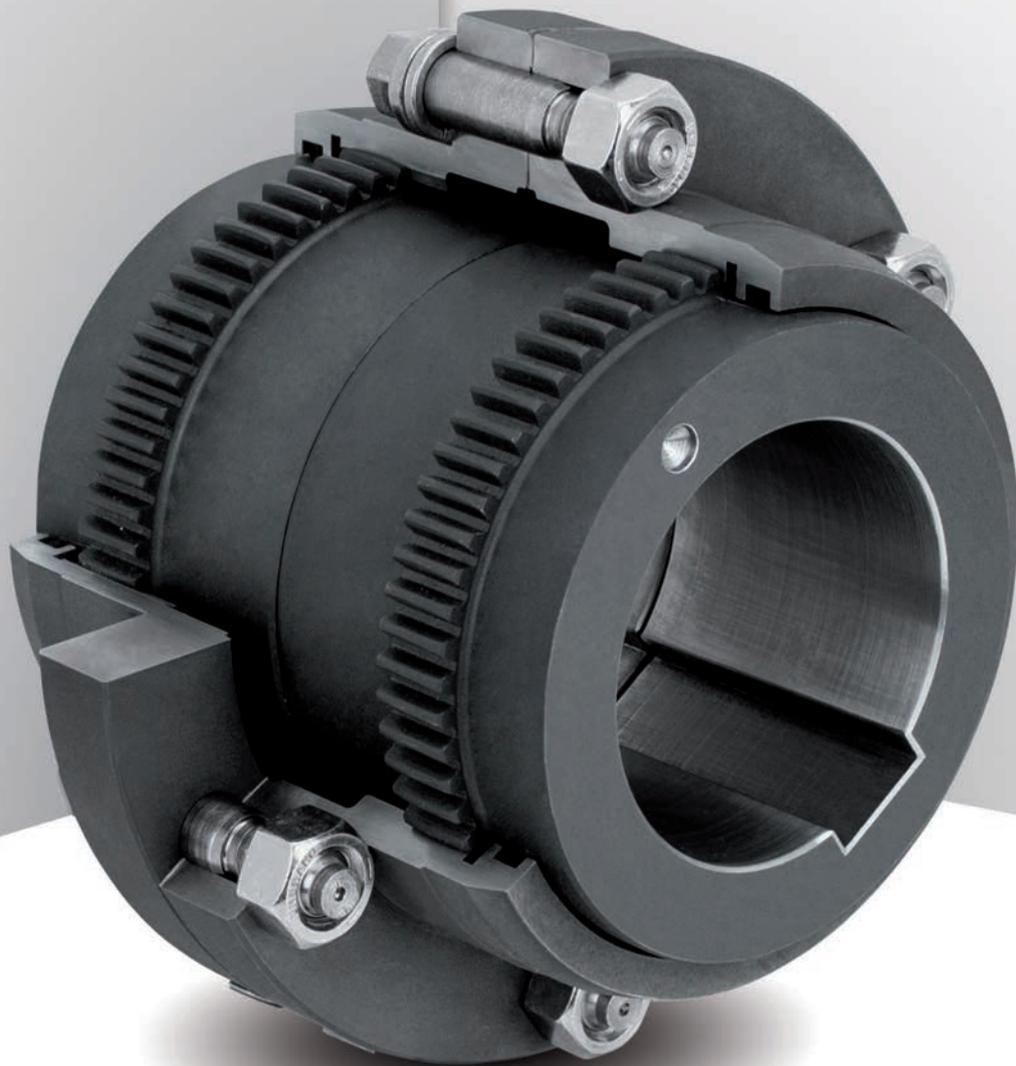

Gear Couplings


Nominal torques
over 3,450,000 lb-in

torsionally rigid

Hubs 3D
crowned toothed

Manganese phosphated
as standard

Hubs balanced according
to DIN ISO 1940 grade 6.3

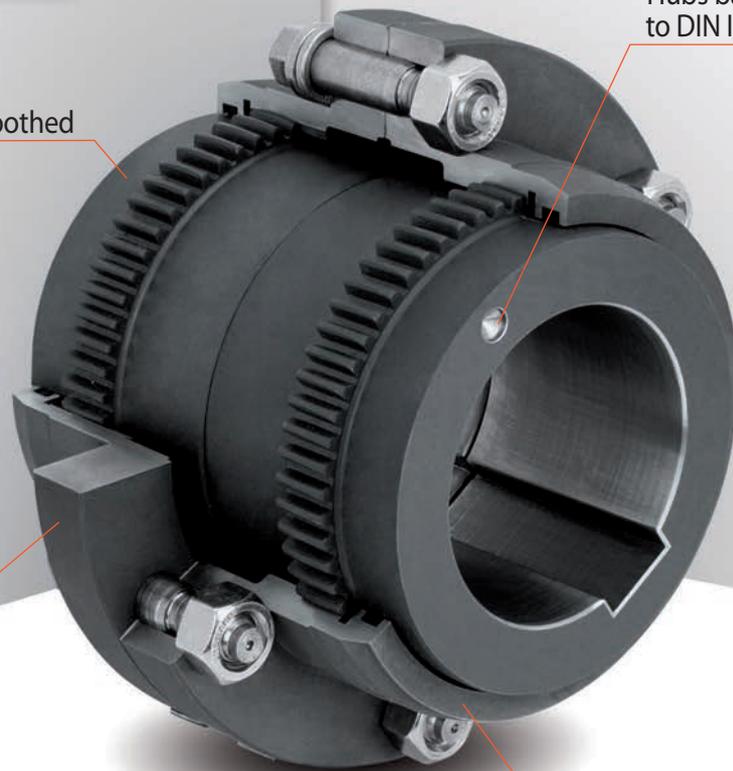

AGMA 9008-B00 conformity
up to size 0090

Your benefit

- >> Corrosion protection
- >> Smooth operation due to standard balanced hubs
- >> Compact design
- >> High torque density
- >> Compensation of axial, radial and angular misalignments
- >> Design with single side rigid hub available
- >> Interchangeable industry standard