


Interchange Chart for Gear Couplings - Series G

Features:

- >> Manufactured in USA
- >> High Nominal Torque Ratings
- >> Large Bore Capacities
- >> Fast Delivery
- >> Complies with AGMA Standard so our half couplings bolt to other AGMA half couplings*

* All are half to half interchanges, except for Amerigear size 201 which uses a different flange pattern

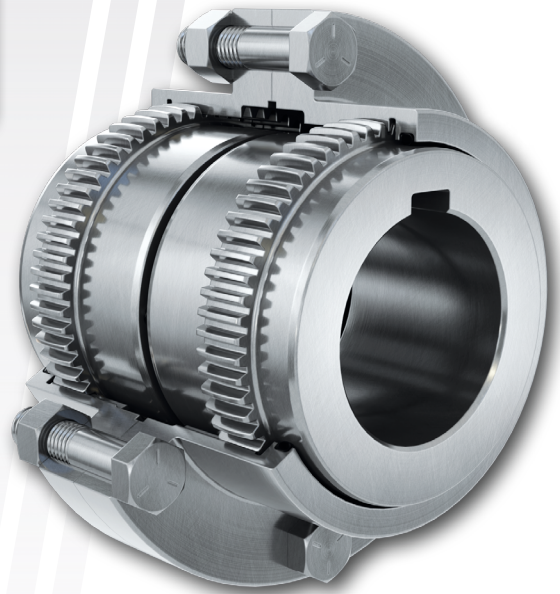

Manufacturer	RINGSPANN	Amerigear	Falk Lifelign	Kop-Flex	Lovejoy	KTR Gearex	System Components	Renold Ajax
Series	G Series	F Series	G20 Series	H Series	F Series	FA Series	F Series	
Model/Size	1010	201	1010G	1H	1	10	1	1
Torque Capacity (lb-in) x 1000	9.6	3.2	10.08	7.5	7.6	8.2	9.77	12.7
Max. Bore (inch)	1.63	1.25	1.88	1.63	1.63	1.97	1.63	1.63
Model/Size	1015	201 ½	1015G	1-1/2H	1-1/2	15	1-1/2	1-1/2
Torque Capacity (lb-in) x 1000	17.0	17.0	20.79	17.0	18.9	17.7	19.5	23.8
Max. Bore (inch)	2.25	2.25	2.38	2.25	2.13	2.52	2.19	2.13
Model/Size	1020	202	1020G	2H	2	20	2	2
Torque Capacity (lb-in) x 1000	31.5	31.5	37.80	31.5	31.5	31.0	32.1	40.6
Max. Bore (inch)	2.75	2.75	2.88	2.75	2.75	3.15	2.75	2.75
Model/Size	1025	202 ½	1025G	2-1/2H	2-1/2	25	2-1/2	2-1/2
Torque Capacity (lb-in) x 1000	53.5	53.6	66.15	56.7	56.7	57.5	56.7	65.7
Max. Bore (inch)	3.50	3.50	3.63	3.50	3.25	3.86	3.50	3.25
Model/Size	1030	203	1030G	3H	3	30	3	3
Torque Capacity (lb-in) x 1000	94.5	95.0	107	101	95.0	89.0	96.0	108
Max. Bore (inch)	4.00	4.00	4.13	4.00	4.00	4.41	4.00	4.00
Model/Size	1035	203 ½	1035G	3-1/2H	3-1/2	35	3-1/2	3-1/2
Torque Capacity (lb-in) x 1000	141.5	142	164	148	151	150	151	166
Max. Bore (inch)	4.50	4.50	4.88	4.50	4.63	5.24	4.63	5.38
Model/Size	1040	204	1040G	4H	4	40	4	4
Torque Capacity (lb-in) x 1000	218.5	214	271	236	221	252	240	264
Max. Bore (inch)	5.50	5.50	5.75	5.50	5.38	6.22	5.50	6.00
Model/Size	1045	204 ½	1045G	4-1/2H	4-1/2	45	4-1/2	4-1/2
Torque Capacity (lb-in) x 1000	324	324	372	318	302	327	315	365
Max. Bore (inch)	6.25	6.25	6.75	6.00	6.00	6.77	6.00	6.63
Model/Size	1050	205	1050G	5H	5	50	5	5
Torque Capacity (lb-in) x 1000	415.5	416	501	441	435	451	447	489
Max. Bore (inch)	6.75	6.63	7.38	6.88	6.50	7.56	6.88	6.63
Model/Size	1055	205 ½	1055G	5-1/2H	5-1/2	55	5-1/2	5-1/2
Torque Capacity (lb-in) x 1000	551	551	655	580	573	575	583	725
Max. Bore (inch)	7.50	7.50	8.25	7.75	7.38	8.27	7.75	7.50
Model/Size	1060	206	1060G	6H	6	60	6	6
Torque Capacity (lb-in) x 1000	749.5	750	800	759	750	752	756	925
Max. Bore (inch)	8.13	8.25	9.13	8.63	8.00	9.13	8.75	8.13
Model/Size	1070	207	1070G	7H	7	70	7	7
Torque Capacity (lb-in) x 1000	1,033	1,033	1,197	1,160	1,008	1,195	1,166	1,390
Max. Bore (inch)	9.63	9.63	10.88	10.38	9.00	10.87	10.38	9.63