


RINGSPANN®

Integrated Freewheels FXM

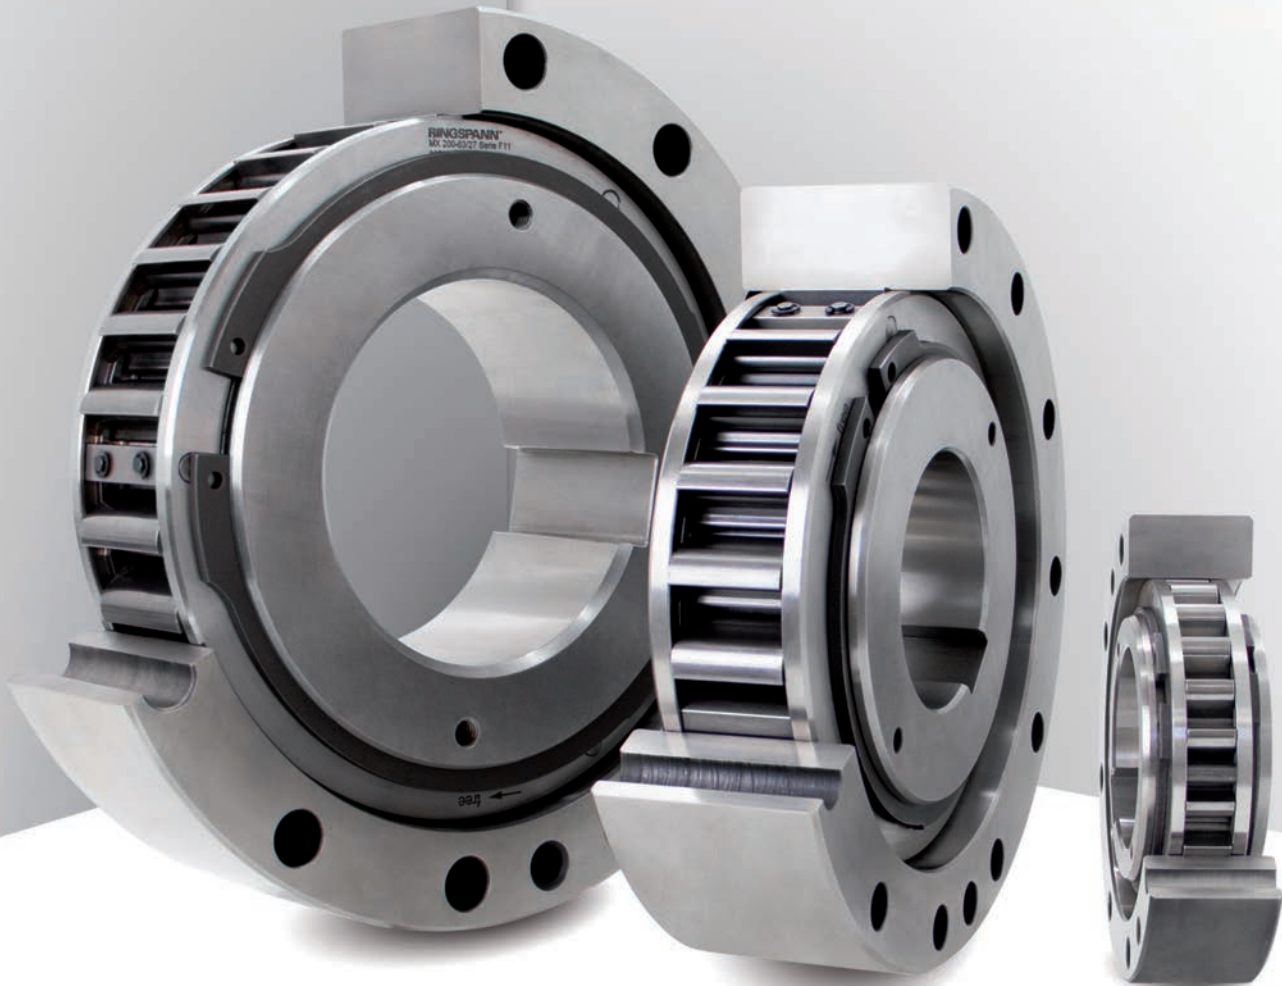

Integrated Freewheels FXM


Application as Backstop
or Overrunning Clutch

Nominal torques from
110 Nm to 1 230 000 Nm

Bores from
20 mm to 500 mm

Attachment to customer
part by bolting to the face

Sprags with
special X geometry

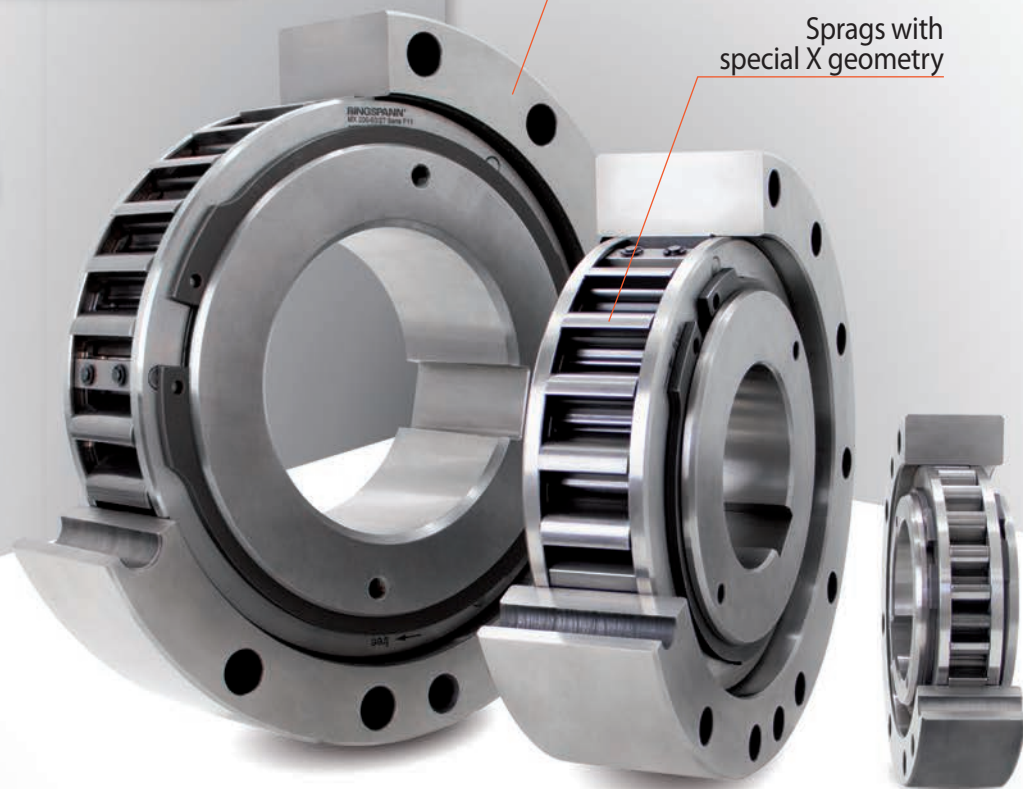

Your benefit

- >> The international standard in quality and performance
- >> With sprag lift-off X for continuous wear-free operation
- >> The special X-geometry of the sprags enables:
 - Highest torque capacity
 - Low sprag lift-off speeds
 - Increased, customer-side component tolerances
- >> Data sheet, CAD models, operating instruction and web shop for direct ordering at www.ringspann.com